

Aerial Work Platforms

Genie® Runabout™ with Jib

Specifications

Models	GR™-26J
Measurements	Metric
Working height maximum*	9.85 m
Platform height maximum	7.85 m
Horizontal reach maximum	2.65 m
Working horizontal reach maximum	3.15 m
Up-and-over clearance maximum	6.70 m
A Platform length	75 cm
B Platform width	90 cm
Toeboard height	15 cm
C Height - stowed	1.99 m
D Length - stowed	2.82 m
E Width	99 cm
F Wheelbase	1.20 m
G Ground clearance - centre	10 cm

Productivity

Maximum platform occupancy (indoor/outdoor)	2/1
Lift capacity	200 kg
Vertical jib rotation	140° (+70°/-70°)
Turntable rotation	350° non-continuous
Turntable tailswing	9 cm
Drive speed - stowed	4.5 km/h
Drive speed - raised	0.65 km/h
Gradeability**	25%
Turning radius - inside	59 cm
Turning radius - outside	2.08 m
Raise / lower speed	54 s/40 s
Controls	24 V DC proportional
Drive	dual rear wheel
Disc brakes	dual rear wheel
Tyres (solid non-marking)	40.5 cm diam. 16-5-11 ¼

Power

Power source	24 V DC (twelve 2 V batteries, 250 Ah capacity)
Hydraulic system capacity	22 L

Sound & Vibration Levels

Sound pressure level (ground workstation)	<70 dBA
Sound pressure level (platform workstation)	<70 dBA
Vibration	<2.5 m/s²



Weight***

2,650 kg

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2001+A2:2009); 2004/108/EC (EMC); 2006/95/EC (LVD)

Range Of Motion GR-26 J

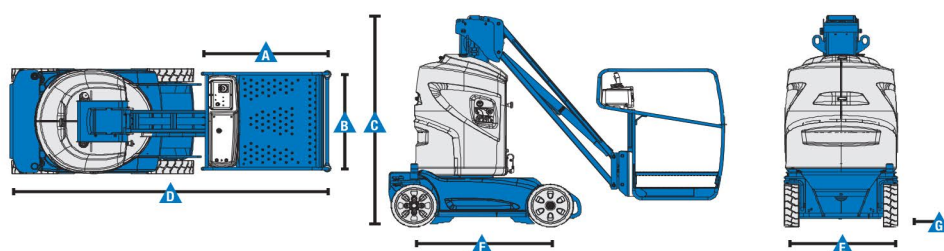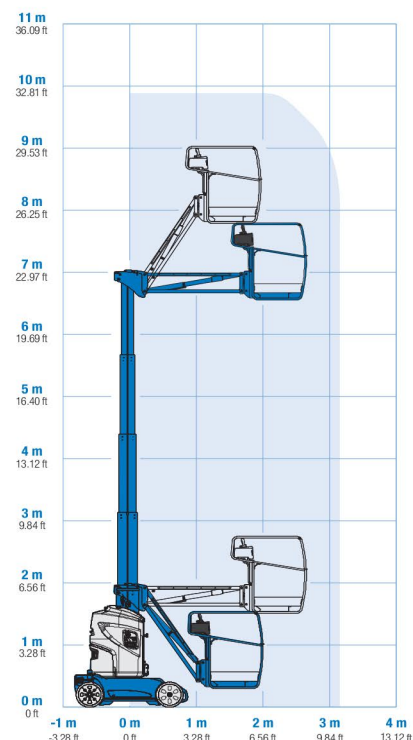

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.