



SELF-PROPELLED SCISSOR LIFTS

**GS™-2646**






# Specifications

MODELS	GS™-2646	
MEASUREMENTS	US	Metric
Working height maximum*	32 ft	9.92 m
<b>A</b> Platform height maximum	26 ft	7.92 m
<b>B</b> Platform height stowed	3 ft 9.6 in	1.16 m
<b>C</b> Platform length - outside	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m
Slide-out platform extension deck	3 ft	.91 m
<b>D</b> Platform width - outside	3 ft 9.3 in	1.15 m
Guardrail height	3 ft 7 in	1.09 m
Toeboard height	6 in	.15 m
<b>E</b> Height - stowed: folding guardrails	7 ft 5 in	2.26 m
rails folded	5 ft 6 in	1.68 m
<b>F</b> Length - stowed	7 ft 11 in	2.41 m
extended	10 ft 10.5 in	3.31 m
<b>G</b> Width	3 ft 10 in	1.17 m
<b>H</b> Wheelbase	6 ft 1 in	1.85 m
<b>I</b> Ground clearance - center	4 in	.10 m
<b>J</b> - with pothole guards deployer	.75 in	.019 m

PRODUCTIVITY		
Maximum platform occupancy**	3	3
Lift capacity	1,000 lbs	454 kg
Lift capacity - extension deck	250 lbs	113 kg
Drive speed - stowed	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed***	30%	
Turning radius - inside	zero	zero
Turning radius - outside	7 ft 6 in	2.29 m
Raise / lower speed	30 / 38 sec	30 / 38 sec
Controls	proportional	
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38 x 13 x 28 cm

POWER		
Power source	24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	3.75 gal	14.2 L

WEIGHT****		
ANSI/CSA	4,312 lbs	1,956 kg
CE/AUS	5,395 lbs	2,447 kg

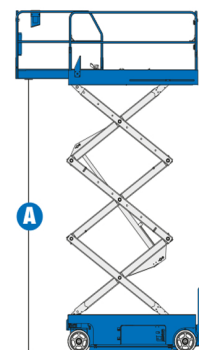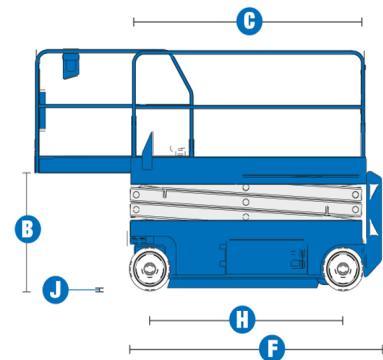

**STANDARDS COMPLIANCE**

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* CE/AUS markets: Two person maximum occupancy on all models. GS-3246 outdoor maximum occupancy is one person.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.