


DIESEL

# Combistar HL-275

## FEATURES

HL-275 D27 4WD/P/N

H (max.)	± 27,20 m
H* (max.)	± 27,50 m
A (max.)	± 25,20 m
C (min.)	2,75 m
DxF (min.)	6,15 x 2,50 m
ExF (max.)	8,25 x 2,50 m
H1	3,89 m
H3	3,13 m
LxB	6,57 x 2,65 m
G	4,50 m
M	195 mm
∅ D	± 7,65 m
(max.)	1000 kg (4 pers. + 680kg)
(max.)	1000 kg (4 pers. + 680kg)
(sec.)	120/105 sec.
	4,2 km/h
	0,5 km/h
	15 x 19,5
(max.)	± 30%
	Diesel 48 - 52 kW
	21.910 kg

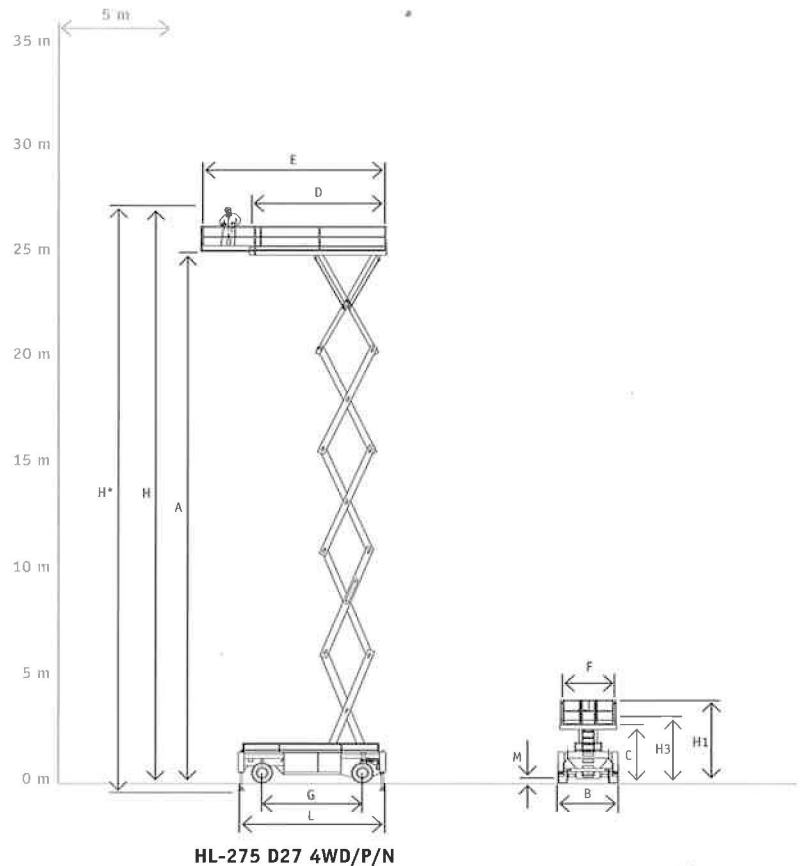

HL-275 D27 4WD/P/N

## ENGLISH

### OPTIONS

Controlbox with quick disconnect	<input checked="" type="checkbox"/>
Hourmeter	<input checked="" type="checkbox"/>
230V supply on platform	<input type="checkbox"/>
Generator 230V	<input type="checkbox"/>
Driving at full height	<input checked="" type="checkbox"/>
Driving, proportional	<input checked="" type="checkbox"/>
Lifting, proportional	<input checked="" type="checkbox"/>
Differential lock	<input checked="" type="checkbox"/>
Fourwheel drive (4WD)	<input checked="" type="checkbox"/>
Oscillating axle (P)	<input checked="" type="checkbox"/>
Levelling jacks (N)	<input checked="" type="checkbox"/>
Lubrication system Easy Lube	<input checked="" type="checkbox"/>
Lubrication system Auto Lube	<input type="checkbox"/>

### SAFETY FEATURES

Scissor skirt	<input checked="" type="checkbox"/>
Descent safety	<input type="checkbox"/>
Flashing beacons	<input type="checkbox"/>
Drive alarm	<input checked="" type="checkbox"/>
Emergency descent	<input checked="" type="checkbox"/>

### APPLICATION

Indoors	<input type="checkbox"/>
Outdoors	<input checked="" type="checkbox"/>
Certified min. temperature	-15°C

© 2014, Holland Lift International B.V. All rights reserved. Designs and specifications may change without prior notice.